

ELKAY® SPECIFICATIONS

Lustertone® Single Bowl Sink Models LRAD and LRADQ Series – A.D.A. Compliant

GENERAL

Highest quality sink seamlessly formed of #18 gauge, type 304 (18-8) nickel bearing stainless steel. Self-rimming.

DESIGN FEATURES

LRAD(Q) Bowl Depth: 5-1/2", 6" or 6-1/2".

Coved Corners: 1-3/4" vertical and horizontal radius.

Bowl and Faucet Deck Recess: 3/16" below outside edge of sink.


Finish: Exposed surfaces are hand blended to a lustrous high-lighted satin finish.

Underside: Fully undercoated to dampen sound and prevent condensation.

OTHER

Drain Opening: 3-1/2" (see back for locations).

NOTE: Unless otherwise specified, models with one, two, three or OS4 faucet hole option are furnished with 3 faucet holes as shown; models with choice of one, two, three, four or five faucet hole option are furnished with 4 faucet holes standard.

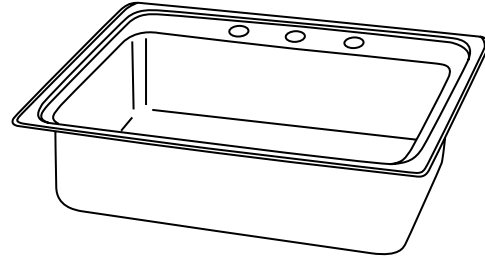


Model LRAD(Q)2521653

SINK DIMENSIONS (INCHES)*

| U-Channel Model Number | Quick-Clip® Model Number | Overall | | Inside Bowl | | | Cutout in Countertop (1 1/2" Radius Corners) | | No. of 1 1/2" Dia. Faucet Holes 4" Center | 3 1/2" Drain Opening (see back for details) | Minimum Cabinet Size | Ship. Wt. Lbs. |
|------------------------|--------------------------|---------|--------|-------------|--------|----|--|--------------------------------|---|---|----------------------|----------------|
| | | L | W | L | W | D | L | W | | | | |
| | | A | B | C | D | E | L | W | | | | |
| LRAD1316 | LRADQ1316 | 13 | 16 | 10 | 10 | ** | 12 ³ / ₈ | 15 ³ / ₈ | 1, 2, MR2 or 3 | Centered | 18 | 9 1/2 |
| LRAD1517 | LRADQ1517 | 15 | 17 1/2 | 12 | 12 | ** | 14 ³ / ₈ | 16 ⁷ / ₈ | 1, 2, MR2 or 3 | Centered | 18 | 10 |
| LRAD1522 | LRADQ1522 | 15 | 22 | 11 1/2 | 16 | ** | 14 ³ / ₈ | 21 ³ / ₈ | 1, 2, MR2 or 3 | Off-Centered Rear | 18 | 12 |
| LRAD1716 | LRADQ1716 | 17 | 16 | 14 | 10 | ** | 16 ³ / ₈ | 15 ³ / ₈ | 1, 2, MR2, 3 or OS4 | Centered | 21 | 12 |
| LRAD1720 | LRADQ1720 | 17 | 20 | 14 | 14 | ** | 16 ³ / ₈ | 19 ³ / ₈ | 1, 2, MR2, 3 or OS4 | Off-Centered Rear | 21 | 12 |
| LRAD1722 | LRADQ1722 | 17 | 22 | 13 1/2 | 16 | ** | 16 ³ / ₈ | 21 ³ / ₈ | 1, 2, MR2, 3 or OS4 | Off-Centered Rear | 21 | 13 |
| LRAD1918 | LRADQ1918 | 19 | 18 | 16 | 11 1/2 | ** | 18 ³ / ₈ | 17 ³ / ₈ | 1, 2, MR2, 3 or OS4 | Off-Centered Rear | 24 | 13 |
| LRAD1918L | LRADQ1918L | 19 | 18 | 16 | 11 1/2 | ** | 18 ³ / ₈ | 17 ³ / ₈ | 1, 2, MR2, 3 or OS4 | Off-Centered Left | 24 | 13 |
| LRAD1918R | LRADQ1918R | 19 | 18 | 16 | 11 1/2 | ** | 18 ³ / ₈ | 17 ³ / ₈ | 1, 2, MR2, 3 or OS4 | Off-Centered Right | 24 | 13 |
| LRAD1919 | LRADQ1919 | 19 1/2 | 19 | 16 | 13 1/2 | ** | 18 ⁷ / ₈ | 18 ³ / ₈ | 1, 2, MR2, 3 or OS4 | Centered | 24 | 13 |
| LRAD2022 | LRADQ2022 | 19 1/2 | 22 | 16 | 16 | ** | 18 ⁷ / ₈ | 21 ³ / ₈ | 1, 2, MR2, 3 or OS4 | Off-Centered Rear | 24 | 13 |
| LRAD2219 | LRADQ2219 | 22 | 19 1/2 | 18 | 14 | ** | 21 ³ / ₈ | 18 ⁷ / ₈ | 1, 2, MR2, 3, 4 or 5 | Off-Centered Rear | 27 | 13 |
| LRAD2219L | LRADQ2219L | 22 | 19 1/2 | 18 | 14 | ** | 21 ³ / ₈ | 18 ⁷ / ₈ | 1, 2, MR2, 3, 4 or 5 | Off-Centered Left | 27 | 13 |
| LRAD2219R | LRADQ2219R | 22 | 19 1/2 | 18 | 14 | ** | 21 ³ / ₈ | 18 ⁷ / ₈ | 1, 2, MR2, 3, 4 or 5 | Off-Centered Right | 27 | 13 |
| LRAD2222 | LRADQ2222 | 22 | 22 | 19 | 16 | ** | 21 ³ / ₈ | 21 ³ / ₈ | 1, 2, MR2, 3, 4 or 5 | Off-Centered Rear | 27 | 13 |
| LRAD2521 | LRADQ2521 | 25 | 21 1/4 | 21 | 15 3/4 | ** | 24 ³ / ₈ | 20 ⁵ / ₈ | 1, 2, MR2, 3, 4 or 5 | Off-Centered Rear | 30 | 15 |
| LRAD2521L | LRADQ2521L | 25 | 21 1/4 | 21 | 15 3/4 | ** | 24 ³ / ₈ | 20 ⁵ / ₈ | 1, 2, MR2, 3, 4 or 5 | Off-Centered Left | 30 | 15 |
| LRAD2521R | LRADQ2521R | 25 | 21 1/4 | 21 | 15 3/4 | ** | 24 ³ / ₈ | 20 ⁵ / ₈ | 1, 2, MR2, 3, 4 or 5 | Off-Centered Right | 30 | 15 |
| LRAD3122 | LRADQ3122 | 31 | 22 | 28 | 16 | ** | 30 ³ / ₈ | 21 ³ / ₈ | 1, 2, MR2, 3, 4 or 5 | Off-Centered Rear | 36 | 19 |

*Length is left to right. Width is front to back.

**Available in 5 1/2", 6" and 6 1/2" depths. Please consult your sales representative for other depths or modifications.

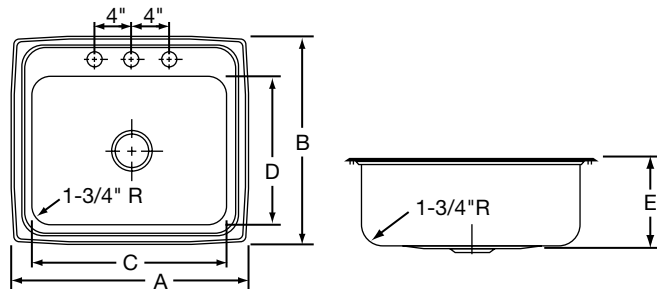


THIS PRODUCT, AS CONSTRUCTED IS SUBJECT TO INTERPRETATION OF A.D.A. REQUIREMENTS. THE UNOBSTRUCTED KNEE SPACE REQUIRED TO SATISFY A.D.A. STANDARDS MAY NOT BE DESIRABLE.

ALL DIMENSIONS IN INCHES, TO CONVERT TO MILLIMETERS MULTIPLY BY 25.4.


In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.


DRAIN OPENING LOCATIONS




±4-1/2" for LRAD(Q)1522
 Off-Centered Rear



Centered




Off-Centered Left




Off-Centered Right


HOLE DRILLING CONFIGURATIONS




1




4




2




OS4



MR2




5



3

Quick-Clip® Mounting System

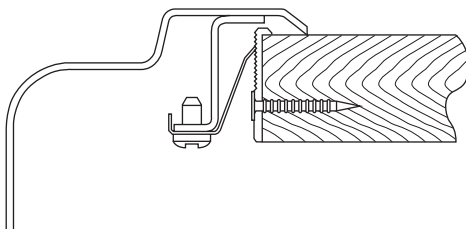

U-Channel Type Mounting System

